


# Separation unit SP 005 724 series.

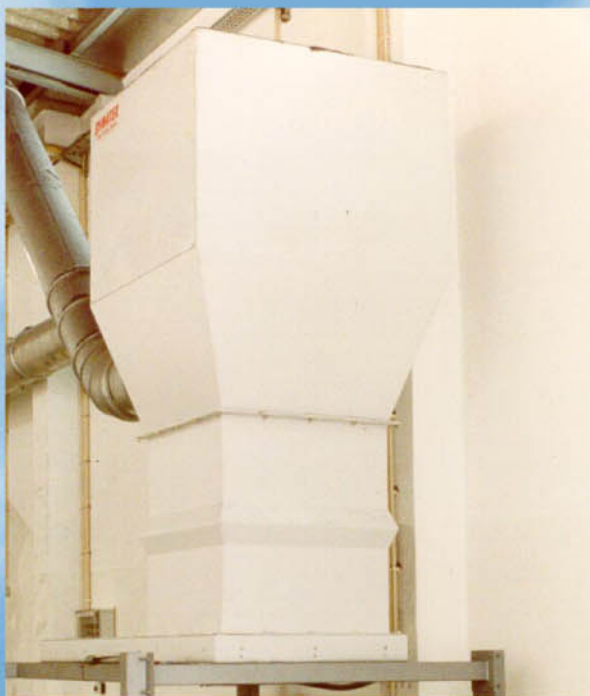

## Technical data:

Models:

- A type (automatic emptying)
- C type (continuous vacuum)

Free filter area: 2,4 m<sup>2</sup>

Air capacity:

- Max 3.500 m<sup>3</sup>/h w/o filter cleaning
- Max 6.000 m<sup>3</sup>/h with filter cleaning

Filter types:

- Woven multi filament polyester or
- Precision woven monofil polyamide

System control:


- PLC-controller with display, directly programmable.

Dimensions:

- Height: 2.350 mm
- Width: 2.500 mm
- Depth: 1.400 mm
- Weight: 500 kg

Optional:

- Automatic filter cleaning.
- Multi adjustable frame for fitting above container or compactor.

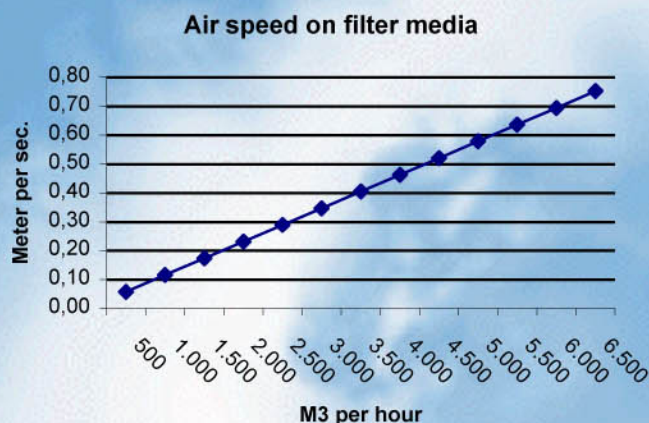

## Function of the separation unit:

The separators are designed for fully automatic waste processing and dump it into a container or a compactor, without any manual handling. The operation is fully automatic and there is no daily maintenance on the system.

The A- type separator stops the suction under the emptying process. This is mainly used for cutting room installations and sewing rooms with low waste volume.

The C- type separator has continuous vacuum, also during the emptying process. This is used for installations in sewing rooms and for quilting machines.

**Symatex** engineering a/s.

DK 7480 Vildbjerg Tel. +45 9713 1899 Fax +45 9713 3498

Web site: [www.symatex.com](http://www.symatex.com) E-Mail: [email@symatex.com](mailto:email@symatex.com)