A-30 Waste-exit system control unit

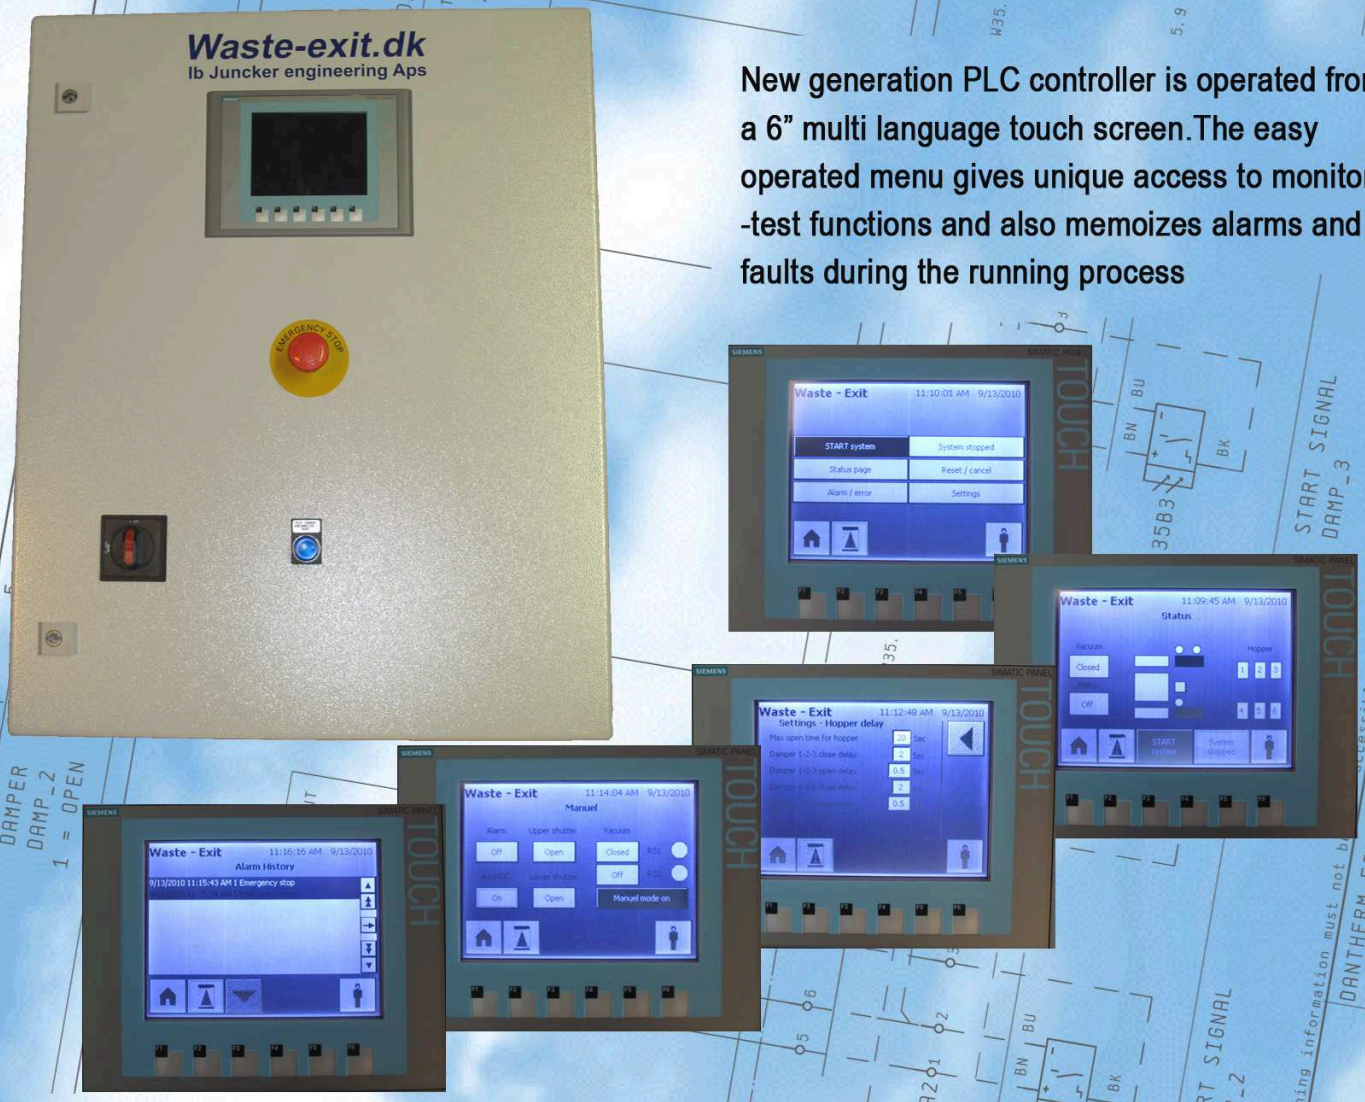

New generation PLC controller is operated from a 6" multi language touch screen.The easy operated menu gives unique access to monitor -test functions and also memoizes alarms and faults during the running process

Integrated flexibility:

The controller is easily expanded with up to 60 in-outputs and thanks to the free relays each in or output can be converted to potential free signal on demand. Alarm in and out puts makes it simple to integrate the controller with other systems.The Waste-exit system controller is simply operated. When the system controller is switched on all is automatically set to running mode and switching OFF sets the system in reset position.

The controler is manufactored according to the European machine declaration (CE) norm. 89/392/EC and High-power regulations EN60 204-1 and IEC 439-1 to 439-5 or to comply with USA UL standards.

Waste-exit Ib Juncker engineering Aps.

DK 7480 Vildbjerg Tel. +45 9713 1899 Fax +45 7014 1425

Web site: www.waste-exit.dk E-Mail: sales@ibjuncker.dk